



Quick Start Guide

Getting Started

Thank you for purchasing the VIPER home monitoring and security system starter kit. The VIPER home starter kit includes everything you need to monitor one entry point and detect motion in one room. The system also has home control expandability. Visit www.viper.com for additional product and warranty information.

What's Included


-  1 Central Controller and Backup Battery
-  1 Indoor Motion Sensor
-  1 Power Adapter
-  2 Door/Window Sensor Sets
-  1 Ethernet/LAN Cable
-  4 AA Alkaline Batteries
-  1 Window Decal

What's Needed

- Computer with internet connection
- Internet access point with RJ-45 port (required for the Central Controller connection)
- Tape measure (used when mounting the motion sensor)
- A coin to open the door / window sensors for battery installation

Note: The 8 digit serial number is located on the bottom of the Central Controller and inside the battery compartment.

Record serial number here: _____

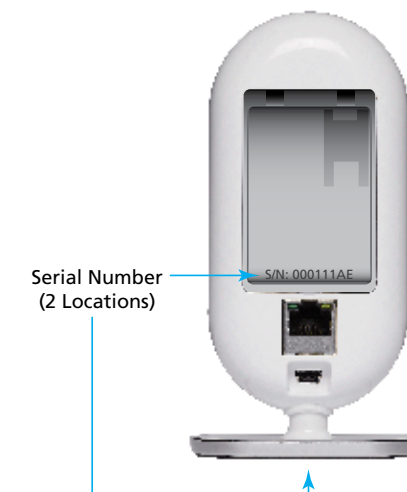

Connecting the Central Controller

Step 1 First, install the backup battery into the battery compartment at the back of the Central Controller.



Step 2 Connect the ethernet/LAN cable to the Central Controller and your router/modem.



Step 3 Plug the power adapter into the back of the controller and the other end into the home wall outlet.



Step 4 The LED is amber upon turn on and changes to green once the connection process is complete.



Registration of System and Services

Step 1 After confirming that the Central Controller displays a green light. Please visit home.viper.com to begin the registration process.

Step 2 Complete the information requested in the Viper home registration page. If you receive an error when proceeding to the next step, make sure you have entered the correct serial number and confirm that the control panel LED is green.



Step 3 Select the desired service plan option and enter the corresponding information. Payment selects premium plan, while no payment defaults to basic plan.



Step 4 Once registration is confirmed, click "Viper Home Control Panel" where you now need to enter the e-mail and password previously provided during registration. You are now ready to install each of the sensors.




Select each of the devices and name them for the location they will be placed.




Installing Sensors

Step 1 Install batteries in each of the sensors as shown below.

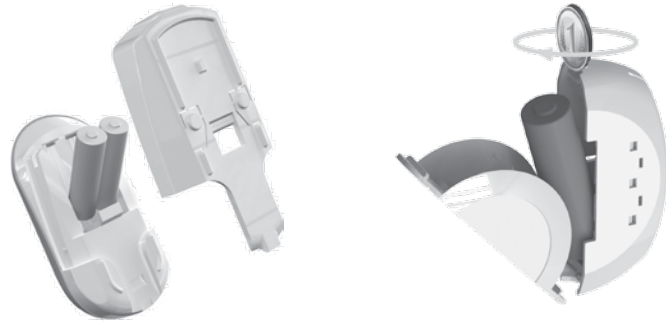


Need installation help? Instructional videos and more can be found online at: www.viper.com

Step 2 Mount the door/window sensors in the desired location. Align the dots across from each other when the door or window is in the closed position, any space between them should be less than 3/4".



Step 3 Mount the motion sensor in a corner or on a flat wall. Avoid mounting in direct sunlight and make sure it is at least 4" from the ceiling and 72" from the floor.

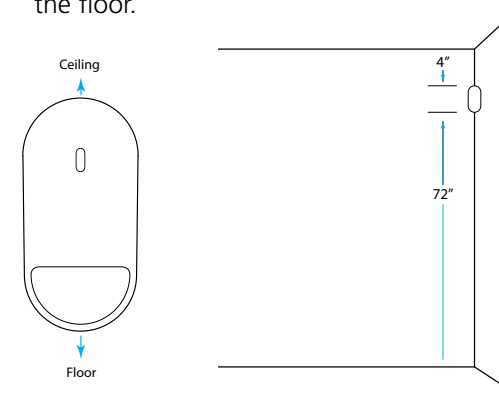

Other Additional accessories available at select retailers and online.



Connecting the App

Step 1 Download the ViperConnect app from the App Store for iPhone/iPad, or Google play for Android devices. Scan QR code below to download app.




Step 2 Once the app has been downloaded, it takes you through a quick tutorial of the features. Once complete, click the login button.



Step 3 Log into your account with user name (e-mail address), password, and 4 digit user code.



Step 4 Once logged in successfully, you are directed to the app screen (below) where you can access the entire suite of VIPER connected products. Launch Home Control.

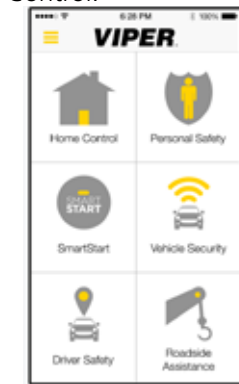

Using the App

Step 1 Use buttons to Arm (away & stay), Disarm, Panic, and receive current system status.



Step 2 Access live video* feed on demand and receive alerts with recorded video of any intruders. * Indoor camera with motion detector required.




Premium service plan required

Step 3 Control lights, thermostats, garage doors, locks, and more from your smartphone with ViperConnect and the Z-wave® Bridge (sold separately).



Premium service plan required

Step 4 View history by all users; arm, disarm, accesses, intrusion alerts, and videos. All history is saved for 60 days.

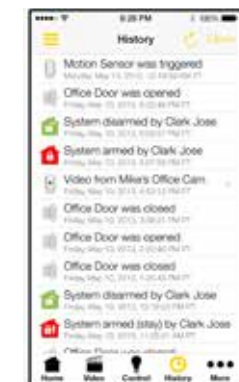

Premium service plan required